
			C		
Z'	ØS				
CHARACTERISTICS	Keying Shown as example		LAYOUT SHOWN AS EXAMPLE		
 -Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum 	Connector dimensionDimNominalØS41.7 MaxZ'31.5 MaxVV THREADM31x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed		
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours-Mass: 35.3 g ± 10%		A 07-10-2016 ISS DATE	Latest modification - by	MOD N	
		Designed By: TITLE	Date: Composite Plu	customer drawing g 8D series	
BASIC SERIES: 8D 5 - 21 SHELL TYPE : Plug with RFI Shielding	J 41 A D	ATION : D SOURIAU	General linear Tolerances: ± WWW.SOURIAU.COM	NPRDS / PROJECT 859 This document is the property of SOURIAU	
	CONTACT TYPE : PIN(50			it must not be reproduced or communicated without permission	

		۵	г П	m		0
		Contact Layout				
4		. +Y				
		31 23: 77 HOLES				
		Insert arrangement 21-41	7			
ယ	size no. con	nber of Size Service Contact Supersedes tacts contacts rating location 41 20 I All MS20055-41	-			
-	F				[
	3					SOURIAU shall not be liable for ar due to a use of the Products w
						the Specifications issued by either c (professional recommenda
N						Count
						PN: 8D521
						PIN. 6D321
						116 First Release
					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Compo
					SCALE	General linear Tolerances:
→					NA	
					SOURIA	U WWW.SOURIAU.
					FORMAT	SOURIAU
l	Н	G	F	E (A3	8D521J4
	П	I G		I E		

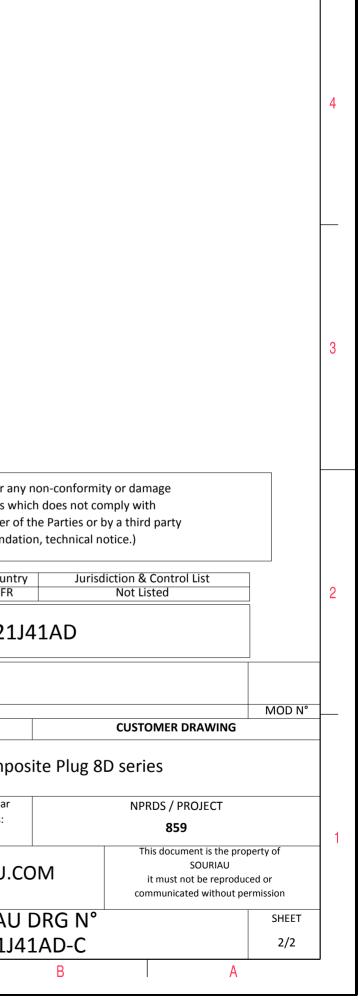

 \triangleright

σ