
	ا	m		0	Φ]
Z'	ØS							4
	Keying Shown as example			LAYOUT SHO	DWN AS EXAMPLE			3
	Keying Shown as ex	ampie						
-Standard : Based on MIL-DTL-38999 Series III		Connector dimension Dim Nominal						
-Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer		ØS 41.7 Max Z' 31.5 Max / THREAD M31x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)					
 Contact Plating : Gold over copper Alloy 0.8μm minimum Durability : 500 Mating cycles Delivered with Souriau contacts and Accessories 			FR Not Listed 2 PN: 8D521M20SN 2					2
-Temperature Range <u>-</u> -65°C to +200°C								-
-Salt Spray : 2000 hours			A 07-10-20	16 First Release				
			ISS DATE Designed By:	Latest modification - by Date:	C	USTOMER DRAWING	MOD N°	┢
			TITLE					-
BASIC SERIES: 8D 5 - 21 M SHELL TYPE : Plug with RFI Shielding	1 20 S N		SCALE		ral linear rances: ±	NPRDS / PROJECT 859		-
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21		ORIENTATION : N CONTACT TYPE : SOCKET(500 Matings)	ENTATION : N SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or					
PLATING : M = Nickel		CONTACT LAYOUT : 21-20	FORMAT		JRIAU DRG N°		SHEET	-
	1		A3					
		I	AS	ינוא	521M20SN-C		1/2	

					,	
	т	വ	п –	п	D	0
		Contact Layout				
4		20 ••••••• ••••••• 18#20				
	2	#8 Concentric Twinax Service M				
		21-20]			
	Ctc	X Y				
	А	2.62 10.03]			
	В	6.1 8.38				
ယ	С	8.64 5.74	-			
	D	8.64 -5.74	-			
	E	6.1 -8.38	-			
	F	2.62 -10.03	-			
	G H	-2.62 -10.03 -6.1 -8.38	-			
-		-8.64 -5.74	-			
	K	-8.64 5.74	-			SOURIAU shall not be liable for any due to a use of the Products whi
	L	-6.1 8.38				the Specifications issued by either of
	M	-2.62 10.03	1			(professional recommendation
	N	0 7.62]			
N	Р	3.3 6.1				Country FR
	R	5.59 0	-			
	S	3.3 -6.1	-			PN: 8D521N
	Т	0 -7.62	-			
	U V	-3.3 -6.1 -5.59 0	-		A 07-10-201	16 First Release
	w	-5.59 0 -3.3 6.1	-		ISS DATE	Latest modification - by
		-5.5 0.1]		Designed By:	Date:
					TITLE	Compos
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIAU	J WWW.SOURIAU.CO
					FORMAT A3	SOURIAU 8D521M2
	Н	G	F	E	D	C
	11	· · · ·	1 I	L \		• •

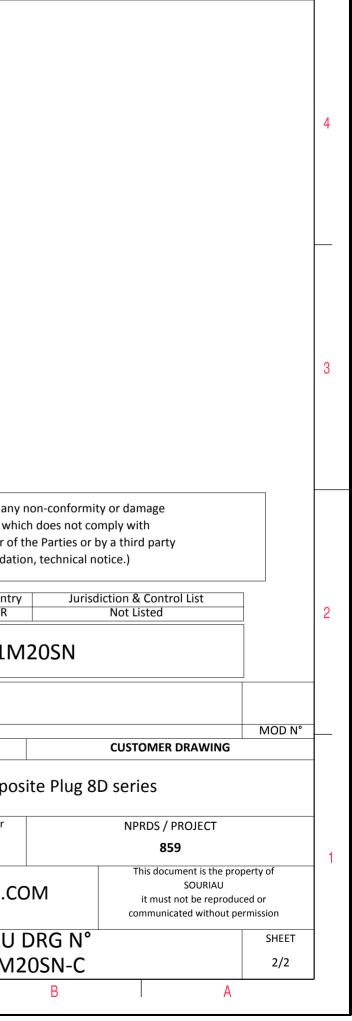

Þ

σ