	—		0	₽	>	
Z'						
Keying St CHARACTERISTICS	hown as example		LAYOUT SHO	WN AS EXAMPLE		
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer Contact Plating : Cold over conner Alloy 0.8µm minimum	DimNominalØS41.7 MaxZ'31.5 MaxVV THREADM31x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed				
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +200°C		A 08-10-2016		0521M48SC		
-Salt Spray : 2000 hours Mass : 62.4 g ± 10%		ISS DATE Designed By:	Latest modification - by Date:	CI	JSTOMER DRAWING	MOD N°
	TITLE		Composite Plug 8D series			
BASIC SERIES: 8D 5 - 21 M 48 S SHELL TYPE : Plug with RFI Shielding - 21 M 48 S	c	SCALE	-{	al linear ances: :	NPRDS / PROJECT 859	rty of
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21	ORIENTATION : C CONTACT TYPE : SOCKET(500 Matings)			d or		
PLATING : M = Nickel	CONTACT LAYOUT : 21-48	FORMAT A3		RIAU DRG N° 521M48SC-C		SHEET 1/2
H G F	E	D	C	В	A	

	т	۵	п	т	0	
		Contact Layout				
		48				
4	×					

F

Е

G

Н


4#8 Power

21-48						
x	Y					
4.57	4.57					
4.57	-4.57					
-4.57	-4.57					
-4.57	4.57					
	X 4.57 4.57 -4.57					

ယ

 \sim

due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country FR PN: 8D521M48SC 08-10-2016 First Release А DATE Latest modification - by ISS Designed By: Date: TITLE SCALE General linear $(\bigcirc$ Tolerances: NA ±---**SOURIAU** WWW.SOURIAU.COM FORMAT A3 С D

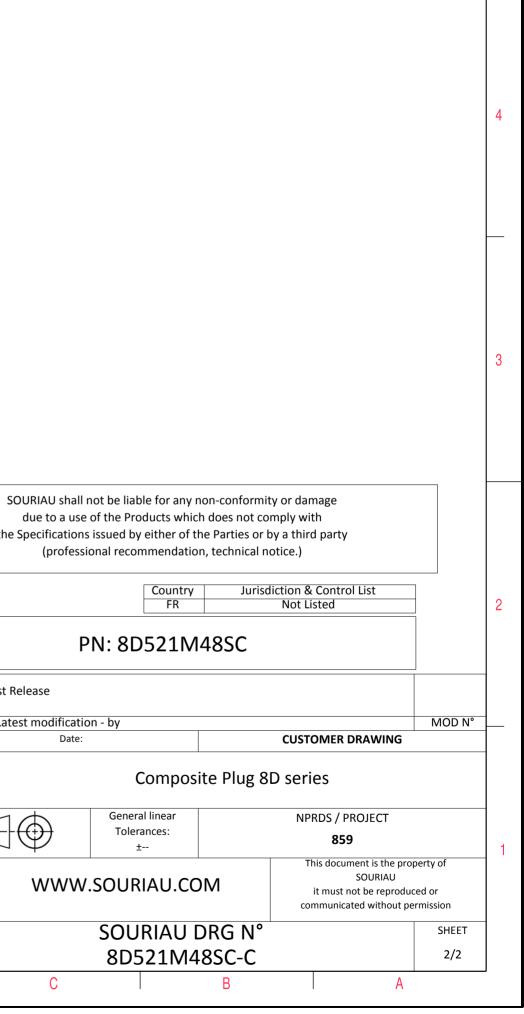

 \succ

ω