

	т	۵	нт – I	Г	1	D	0	
ſ								ł
4								
ယ								IOWN AS EXA
							LAYOUT SP	10WN AS EXA
			Keying Show	n as example				
	CHARACTERISTICS			Connector d	imension			
	-Standard : Based on MIL-	-DTL-38999 Series III		Dim ØS	Nominal 41.7 Max			
	-Shell Plating : -Insulator :	Composite Nickel Thermoplastic Copper Alloy		Z' VV THREAD	31.5 Max M31x1-6g		SOURIAU shall not be li due to a use of the P the Specifications issued (professional rec	Products which by either of th
N	-Contact Plating :	Silicon Elastomer Gold over copper Alloy 0.8µm min 500 Mating cycles ontacts and Accessories	mum				PN: 8	Country FR D521M
		-65°C to +200°C 2000 hours				A 08-10-20 ISS DATE Designed By:	016 First Release Latest modification - by Date:	
						TITLE		Composi
<u> </u>	BASIC SERIES: SHELL TYPE : Plug with R	8D 5 - 2 RFI Shielding	1 M 77 P N			SCALE		eral linear lerances: ±
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21 CONTACT TYPE : PIN(500 Matings)						SOURIAU WWW.SOURIAU.C	
	PLATING : M = Nic	ckel	┘ │ └───	CONT	CONTACT LAYOUT : 21-77	-		URIAU E
			I			A3		521M7
L	Н	G	F	E		D	С	
					V			

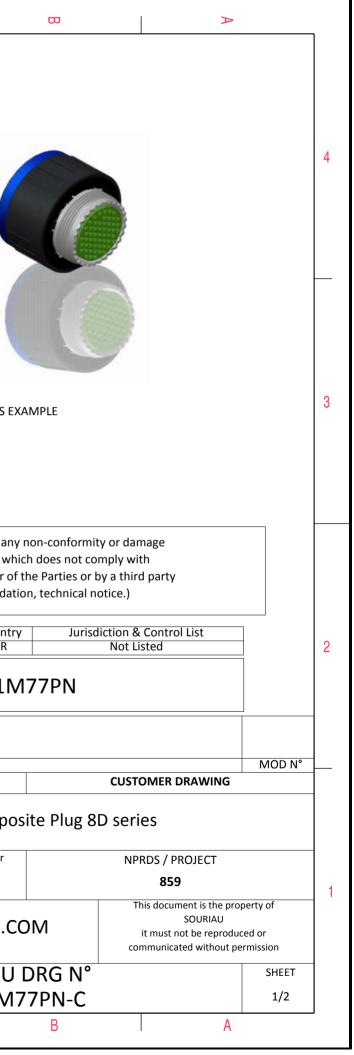

	Ŧ							
	<u> </u>		م	г	m		0	
4		Contact Layout 77						
		17#22D 2#8 Triax						
CO	Ctc A B C D E F G H J K L K L N P	21-77 X 1.96 5.46 8.51 10.46 10.46 8.51 5.46 1.96 0 -1.96 -5.46 -8.51 -10.46 -10.46	Y 8.38 7.67 5.79 2.82 -2.82 -2.82 -5.79 -7.67 -8.38 -5.41 -8.38 -5.41 -8.38 -7.67 -5.79 -2.82 2.82				due to a use the Specification	not be liable for any e of the Products whi s issued by either of ional recommendatio
	R S T U V	-8.51 -5.46 -1.96 -4.57 4.57	5.79 7.67 8.38 0 0				10-2016 First Release DATE Latest modificati	
						SCALE NA SOUF FORMAT A3		Compos General linear Tolerances: ± V.SOURIAU.CO SOURIAU 8D521M7
	Н	(G	F	E	D	С	

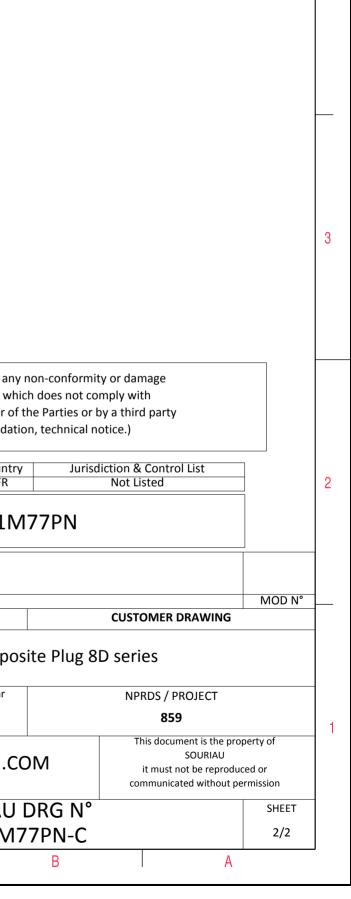

4