
	<b>T</b>	m	D	0	₩ 3	۵	
	AV Thread						2
				LAYOUT SHOWN AS EX	KAMPLE		(
	Keying Shown as e	xample					
CHARACTERISTICS	· · ·						
-Standard : Based on MIL-DTL-38999 Series III		Connector dimension Dim Nominal					
-Shell Material : Composite		ØS 41.7 Max		COUDIALL shall not be lighte for any	, non conformity, or domogo		╞
-Shell Plating : Without Plating		Z 31 Max /V THREAD M31x1-6g	SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with				
-Insulator : Thermoplastic				the Specifications issued by either of	the Parties or by a third party		
-Contacts : Copper Alloy				(professional recommendat	ion, technical notice.)		
-Seals & Grommet : Silicon Elastomer			L	Countr	y Jurisdiction & Control List		
-Contact Plating : Gold over copper Alloy 0.8μm mi	nimum			FR	Not Listed		
-Durability : 500 Mating cycles							
-Delivered with Souriau contacts and Accessories			PN: 8D521X72BE				
-Temperature Range : -65°C to +175°C				Eirst Dalaass			-
-Salt Spray : 2000 hours			A 11-10-2016				
_			ISS DATE	Latest modification - by		MOD N°	-
				esigned By: Date: CUSTOMER DRAWIN		3	—
			TITLE	TITLE Composite Plug 8D series			
BASIC SERIES: 8D 5 - SHELL TYPE : Plug with RFI Shielding	21 X 72 B E		SCALE	General linear Tolerances:	NPRDS / PROJECT 859		_
					This document is the		_
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21		ORIENTATION : E CONTACT TYPE : SOCKET(500 Matings)	SOURIAU	WWW.SOURIAU.C	OM SOURIAU it must not be repro- communicated withou	oduced or	
	L		FORMAT	COUDIAL			
		CONTACT LAYOUT : 21-72		SOURIAU		SHEET	
PLATING : X = Without Plating			A3	8D521X7		1/2	

	Ŧ	۵	г	m		<b>O</b>	
		Contact Layout					
		72					
4							
		2#4 Power					
		6#16	1				
	Ch-	21-72	-				
	Ctc	X Y 0 6.19	-				
	A	8.5 4.3	-				
	c	6.25 0	-				
	D	8.5 -4.3	-				
ω	E	0 -6.19	1				
	F	-8.5 -4.3	]				
	G	-6.25 0	-				
	Н	-8.5 4.3					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat	
N						Countr FR	
						PN: 8D521>	
					A 11-10-20	016 First Release	
					ISS DATE		
					Designed By:	Date:	
					TITLE	Сотро	
					SCALE	General linear Tolerances:	
<u> </u>							
					SOURIA	RIAU WWW.SOURIAU.C	
					FORMAT	SOURIAU	
					A3	8D521X7	
l	Н	G	F	E	1 D		
			•	-			

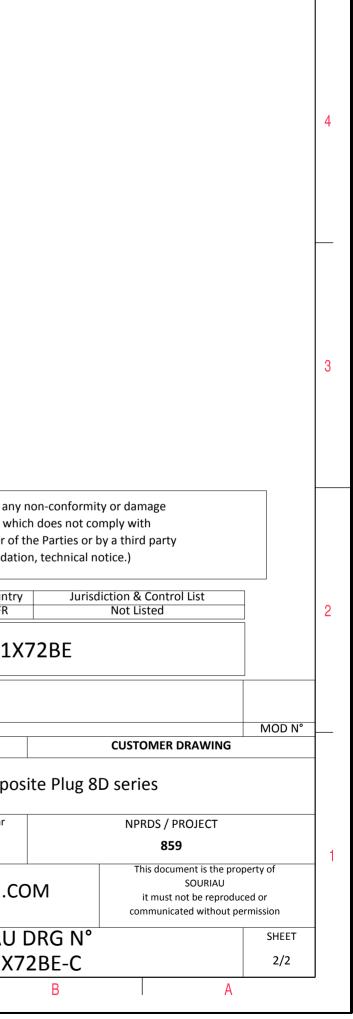

 $\triangleright$ 

σ