
ſ	т 🛛 🖓 Т	т	D		0	Φ	Þ]
4	Z ØS I I I I I I I I I I I I I I I I I I I								4
ى س					LAYOUT SHOWN AS EX	AMPLE			3
	Keying S	hown as example							
	CHARACTERISTICS	Connector dimension]						
$ \longrightarrow $	-Standard : Based on MIL-DTL-38999 Series III	Dim Nominal ØS 41.7 Max						-,	
	-Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic -Contacts : Copper Alloy	Z 31 Max VV THREAD M31x1-6g		1	SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendati	ch does not comply v the Parties or by a th	vith ird party		
N	-Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8µm minimum		L		Country FR		& Control List Listed		2
	-Durability : 500 Mating cycles -Delivered without Souriau contacts				PN: 8D521Z				
	-Temperature Range65°C to +175°C			12-10-2016 Fir	st Polooso				-
	-Salt Spray : 500 hours								
_			ISS Desig	DATE I ned By:	Latest modification - by Date:	CUS		MOD N°	
					LE Aluminium Plug 8D series				
	BASIC SERIES: 8D 5 - 21 Z 42 P SHELL TYPE : Plug with RFI Shielding - - 21 Z 42 P	E L Delivered W		CALE	General linear Tolerances:	N	IPRDS / PROJECT 859		1
	CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21 CONTACT TYPE : PIN(500 Ma			SOURIAU This document is the property of SOURIAU it must not be reproduced or communicated without permission				or	
	PLATING : Z = Black Zinc Nickel	CONTACT LAY		RMAT	SOURIAU			SHEET	
				43	8D521Z4			1/2	
l	H G F	E	D		C	B	A		1

	т	Q	н т	m	U	0	
4		Contact Layout 42					
	Ctc A B	2#4 Power 21-42 X Y 0 6.19 0 -6.19					
ω							
	-					SOURIAU shall not be liab due to a use of the Pro the Specifications issued by (professional recon	oducts wh v either o mmendat
N						PN: 8D	Countr FR
					A 12-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:	
					SCALE NA	Genera Tolera	Alumin al linear rances: ±
					FORMAT	U WWW.SOUR SOU	
	Н	G	F	E	A3		521Z4

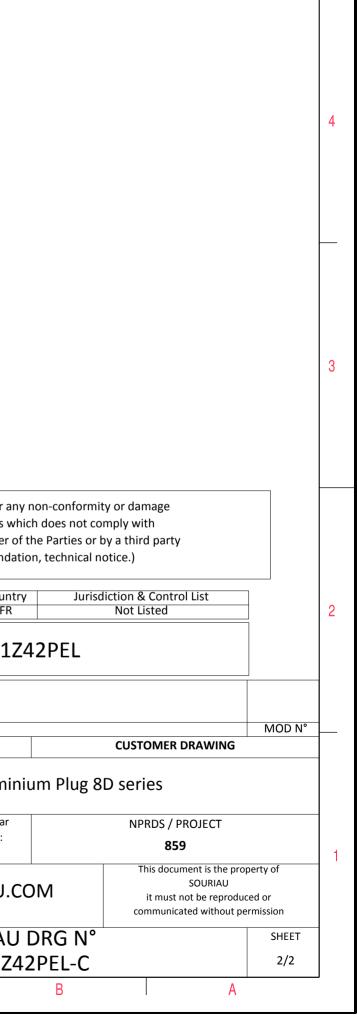

 \triangleright

σ