
	т Q	m	D	0	₩	Þ
Image: Set of the foregoing in the set of the foregoing intervence i						
Anatori: Source of the root of t						
CHARACTERISTICS -Standard: Based on MIL-DT-38999 Series III -Shell Material :: Murnitum -Shell Material :: Murnitum -Shell Material :: Murnitum -Shell Material :: Stack Zin Nickel -Insulator :: Black Zin Nickel -Insulator :: Contracts -Contact Based : Contract Material -Seals & Grommet :: Slicon Llastomer -Contact Based :: Contract May Object -Divered with Souriau contacts and Accessories :: Souriau Contact Sand Accessories -Diversitiers :: Souriau Contact Sand Accessories -Sait Spray :: Souriau Contact Sand Accessories -Sait Spray :: Souriau Contact Sand Accessories -Sait Spray :: Sait Spray Sait Spray : Sait Spray Sait Spray : Sait Spray Sait Spray				LAYOUT SHOWN AS EXA	AMPLE	
- Standard : Based on ML-DT-38999 Series III - Shall Material : Aluminium - Shell Material : Aluminium - Shell Material : Black Zinc Nickel - Insulator : Black Zinc Nickel - Contact Is in polaritic : Copper Alloy - Seals & Grommet : Silicon Elastomer - Contact Plaing : Gold over copper Alloy - Seals & Grommet : Silicon Elastomer - Ourabelly : Gold over copper Alloy - Seals & Grommet : Silicon Elastomer - Ourabelly : Gold over copper Alloy - Seals & Grommet : Silicon Elastomer - Ourabelly : Gold over copper Alloy - Seals & Grommet : Silicon Elastomer - Ourabelly : Gold over copper Alloy - Delivered with Souriau contacts and Accessories	Keyin	g Shown as example				
Shell Material A Jin Max 2 41.7		· · · · · · · · · · · · · · · · · · ·				
-Seals & Grommet :: Silicon Elastomer -Contact Plating :: Gold over copper Alloy 0.8µm minimum -Durability :: S00 Mating cycles -Delivered with Souriau contacts and Accessories -Delivered with Souriau contacts and Accessories -Seals & Grommet :: S100 hours -Seals & Spray :: S00 hours A 12:10-2016 First Release -Sait Spray :: S00 hours BASIC SERIES: 8D 5 SHELL SIZE : 21 CONTACT TYPE : Plug with RFI Shielding CONTACT TYPE : Plug with RFI Shielding SHELL SIZE : 21 CONTACT TYPE : Plug with RFI Shielding PLATING :: Z = Black Zinc Nickel CONTACT TYPE : PIN(S00 Matings) CONTACT TYPE : PIN(S00 Matings) PLATING :: Z = Black Zinc Nickel CONTACT TYPE : PIN(S00 Matings)	-Shell Material : Aluminium -Shell Plating : Black Zinc Nickel -Insulator : Thermoplastic	ØS 41.7 Max Z 31 Max		due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party		
Durability : 500 Mating cycles Delivered with Souriau contacts and Accessories Temperature Range : -65°C to +175°C -salt Spray : 500 hours BASIC SERIES: 8D 5 - 21 Z 72 P N BASIC SERIES: 8D 5 - 21 Z 72 P N SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 21 PLATING : Z = Biack Zinc Nickel	-Seals & Grommet : Silicon Elastomer					l List
-Salt Spray : 500 hours A 12:10-2016 First Release ISS DATE Latest modification - by MOD N* Designed By: Date: CUSTOMER DRAWING BASIC SERIES: BASIC SE	-Durability : 500 Mating cycles					
-Salt Spray : 500 hours -Salt Spray : 500	-Temperature Range : -65°C to +175°C		A 12-10-2016	First Release		
BASIC SERIES: 8D 5 - 21 Z 72 P N SCALE SCALE Scale Stell Stell <th< td=""><td>-Salt Spray : 500 hours</td><td></td><td>ISS DATE</td><td>Latest modification - by</td><td>CUSTOMER I</td><td></td></th<>	-Salt Spray : 500 hours		ISS DATE	Latest modification - by	CUSTOMER I	
BASIC SERIES: BASIC SERIES:<			TITLE	TITLE Aluminium Plug 8D series		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : N SHELL SIZE : 21 CONTACT TYPE : PIN(500 Matings) PLATING : Z = Black Zinc Nickel CONTACT LAYOUT : 21-72		Ν		Tolerances:		
PLATING : Z = Black Zinc Nickel FORMAT SOURIAU DRG N° SHEET	CONTACT TYPE : Standard Crimp Contact		SOURIAU	SOURIAU This document is the property of SOURIAU It must not be reproduced or it must not be reproduced or		
			-			

	т	۵	г	m		0
		Contact Layout				
4		72				
		2#4 Power 6#16				
		21-72	1			
	Ctc	X Y	-			
	A	0 6.19				
	В	8.5 4.3	1			
	С	6.25 0				
ယ	D	8.5 -4.3				
	E	0 -6.19	-			
	F	-8.5 -4.3	-			
	G	-6.25 0	-			
	Н	-8.5 4.3				
	L					
						SOURIAU shall not be liable for any due to a use of the Products wh the Specifications issued by either of (professional recommendat
\sim						Countr FR
						PN: 8D5212
						16 First Release
_					ISS DATE Designed By:	Latest modification - by Date:
					TITLE	Alumin
<u> </u>					SCALE NA	General linear Tolerances: ±
					SOURIA	U WWW.SOURIAU.C
					FORMAT	SOURIAU
					A3	8D521Z7
l	Н	G	F	E	D	C
	11	· · · ·				

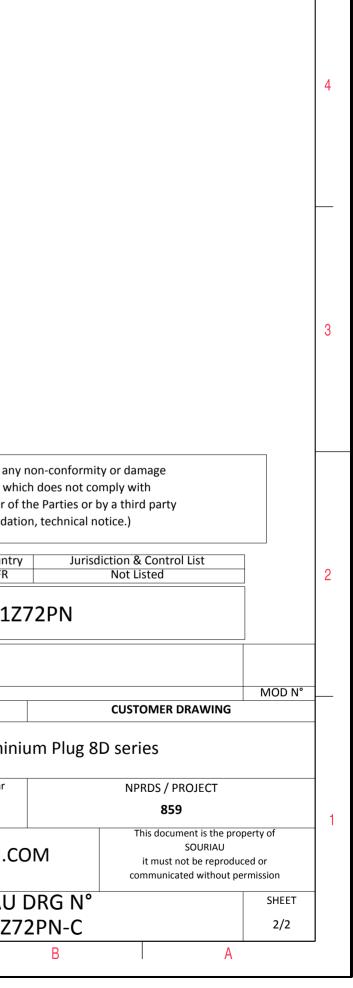

 \triangleright

σ