
	Ξ	П	m			0	σ		A	
IDENTIFY INTRACTORY INTOLEXANDER IN INTRACTORY INTRACTORY INTOLEXANDER I		ØS								•
CHARACTERISTICS Standard : Based on MIL-DTL-38999 Series III Schell Material ::::::::::::::::::::::::::::::::::::						LAYO	JT SHOWN AS EXAMPLE			
CHARACTERISTICS Standard : Based on MIL-DTL-38999 Series III Schell Material ::::::::::::::::::::::::::::::::::::										
Standard : Based on MIL DTL 38999 Series III Dimetor with Rounian Shell Material :: Composite Shell Material :: Composite Shell Material :: Composite Shell Material :: Composite -Insultion :: Composite -Insultion :: Composite -Contact Size : Copper Alloy Seals & Grommet :: Silicon Flastomer -Contact Hairs :: Copper Alloy 0.3µm minimum -Outact Hairs :: Copper Alloy 0.3µm minimum -Outact Hairs :: Contact Hairs -Delivered with Souriau contacts and Accessories :: Phile Hairs -Temperature Range :: Souriau Contact -Salit Spray :: 2000 hours BASIC SERIES: : 8D : Souriau SHELL TYPE : Standard Crimp Contact SHELL STE : 23 M : On S RELL STE : 8D : 23 M : Souriau ORTENTATION : N : Contact Trype: Standard Crimp Contact : Souriau : Souriau SHELL STE :: 3 : M = Nickel : Contact Trype: Socket(soo Mating; : Souriau : Souriau : Souriau		Keying Shown	as example							
Shell Material :: Composite Shell Material :: Composite Shell Material :: Composite Shell Material ::: Composite Sourial recommendation, technical notice.) ::: Contact Plating Sourial recommendation, technical notice.) ::: Contact Plating Ourability ::: Sourial recommendation, technical notice.) Ourability ::: Sourial recommendation, technical notice.) Phy: Basic Series Shell Type: ::: Standard Crimp Contact Shell Type::: Standard Crimp Contact ::: Sourial recommendation - by Shell Type::: 23 M ::: Sourial Plating::: M = Nickel ::: Contact Type::: Standard Crimp Contact Shell Sig::: M = Nickel ::: Contact Type::: Standard Crimp Contact		[
Shell Plating : Nickel - Shell Plating : Nickel - Insulator : Delivered with Source and the products with desined comply with the Specifications issued by either of the Parties or by a third party (professional recommediation, technical notice.) - Seals & Grommet : Silicon Elastomer - Ourability : Gold over copper Alloy 0.8µm minimum - Ourability : Source and the commendation, technical notice.) - Ourability : Source and the commendation is the products with desing comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) - Ourability : Source and the commendation is the inforcementation is the product with desing comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) - Ourability : Source and the commendation is the product with desing the complexity of and the commendation is the property of State a			ØS 44.9 Max							┢
-Insulator :: Thermoplastic -Contacts :: Copper Alloy -Seak & Grommet :: Silcon Elastomer -Contact Plating :: Gold over copper Alloy 0.8µm minimum -Ourability :: Sold Atting cycles -Delivered with Souriau contacts and Accessories PIN: 8D523M065N -Temperature Range :: 65°C to +200°C -Salt Spray :: 2000 hours BASIC SERIES: 8D SHELL TYPE : 23 CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 23 : CONTACT TYPE : Standard Crimp Contact PLATING :: M = Nickel : CONTACT LAYOUT : 23:06										
- Contracts : Copper Alloy - Seals & Grommet : Silicon Elastomer - Contract Plating : Gold over copper Alloy 0.8µm minimum - Ourability : S00 Mating cycles - Delivered with Souriau contacts and Accessories - Temperature Range : -65°C to +200°C - Salt Spray : 2000 hours BASIC SERIES: 8D SHELL TYPE : 23 CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 23 CONTACT TYPE : SOCKET(500 Matings) PLATING : M = Nickel		L								
 Contact Plating :: Gold over copper Alloy 0.8µm minimum Durability :: 500 Mating cycles Delivered with Souriau contacts and Accessories Temperature Range :: -65°C to +200°C -Salt Spray :: 2000 hours A 06-10-2016 First Release A 06-10-2016 First Release SheELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact BASIC SERIES: BD SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact BLSIC SERIES: BD SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: Standard Crimp Contact SHELL TYPE :: Plug with RFI Shielding CONTACT TYPE :: SOCKET(S00 Matings) REAT CONTACT TYPE :: SOCKET(S00 Matings)	-Contacts : Copper Alloy					(profession	al recommendation, techn	ical notice.)		
- Durability :: 500 Mating cycles - Durability :: 500 Mating cycles - Delivered with Souriau contacts and Accessories - Temperature Range :: 65°C to +200°C - Salt Spray :: 2000 hours A 06-10-2016 First Release - Salt Spray :: Souriau BASIC SERIES: : 8D : SHELL TYPE : Plug with RPI Shielding : CONTACT TYPE : State: : SHELL SIZE : SHELL SIZE : SHELL SIZE : M : M : M : SOURIAU WWW.SOURIAU.COM : must not be reproduced or communicated without permission : PORMAT : M = Nickel	-Seals & Grommet : Silicon Elastomer									
Delivered with Souriau contacts and Accessories Temperature Range :: -65°C to +200°C Salt Spray :: 2000 hours A 06-10-2016 First Release ISS DATE Latest modification - by MOD N° Designed By: Date: CONTACT TYPE :: Plug with RFI Shielding 06 SHELL SYZE : 23 M 06 PLATING :: M = Nickel CONTACT TYPE : SOCKET(500 Matings) CONTACT TYPE :: SOCKET(500 Matings) This document is the property of communicated without permission SOURIAU WWW.SOURIAU.COM This document of the property of communicated without permission	-Contact Plating : Gold over copper Alloy 0.8μm minimum						FR	Not Listed		
-Temperature Range : -65°C to +200°C -Salt Spray : 2000 hours A 06-10-2016 First Release ISS DATE Latest modification - by MOD N ^e Designed By: Date: CUSTOMER DRAWING Designed By: Date: CUST										
-Salt Spray : 2000 hours -Salt Spray : 2000 hours A 06-10-2016 First Release ISS DATE Latest modification - by MOD N° Designed By: Date: CUSTOMER DRAWING Date: COMPosite Plug 8D series TITLE Composite Plug 8D series SCALE General linear Tolerances: ± 859 ± 859 SOURIAU WWW.SOURIAU.COM Tibi document is the property of SOURIAU it must not be reproduced or communicated without permission CONTACT TYPE : SOCKET(500 Matings) PLATING : M = Nickel CONTACT TYPE : SOCKET(500 Matings) CONTACT TYPE : SOCKET(500 Matings) CONTACT TYPE : SOCKET(500 Matings) CONTACT TYPE : SOCKET(500 Matings)	-Delivered with Souriau contacts and Accessories						. 005251010051	u		
BASIC SERIES: 8D 5 23 M 06 S N BASIC SERIES: 8D 5 - 23 M 06 S N CONTACT TYPE : Standard Crimp Contact ORIENTATION : N Scale General linear to lerances: ± NPRDS / PROJECT SHELL SIZE : 23 CONTACT TYPE : Standard Crimp Contact CONTACT TYPE : SOCKET(500 Matings) SOURIAU WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission PLATING :: M N NEIL SOURIAU DRG N° SHEET	-				A 06-10-2	2016 First Release				
BASIC SERIES: 8D 5 - 23 M 06 S N BASIC SERIES: 8D 5 - 23 M 06 S N CONTACT TYPE : Standard Crimp Contact ORIENTATION : N SHELL SIZE : 23 M 06 S N ORIENTATION : N SOURIAU SOURIAU.COM This document is the property of SOURIAU SHELL SIZE : 23 CONTACT TYPE : SOCKET(500 Matings) CONTACT TYPE : SOCKET(500 Matings) This document is the propoduced or communicated without permission PLATING : M = Nickel CONTACT TYPE : SOCKET(500 Matings) FORMAT SOURIAU DRG N° SHEET	-Salt Spray : 2000 hours			-		TE Latest modification	by			•
BASIC SERIES: 8D 5 - 23 M 06 S N SHELL TYPE : Plug with RFI Shielding CONTACT TYPE : Standard Crimp Contact 0 S N N SCALE N N SCALE N N SCALE N N N SCALE N N N SCALE N				-				CUSTOMER DRAWI		
BASIC SERIES. SUB S - 25 N 00 S N N Tolerances: 859 SHELL TYPE : Plug with RFI Shielding ORIENTATION : N NA SUB CONTACT TYPE : Standard Crimp Contact NA SUB CONTACT TYPE : SOCKET(500 Matings) This document is the property of SOURIAU.COM SUB CONTACT TYPE : SOCKET(500 Matings) This document is the property of SOURIAU SOURIAU It must not be reproduced or communicated without permission PLATING : M = Nickel M = Nickel CONTACT LAYOUT : 23-06 FORMAT SOURIAU DRG N° SHEET					TITLE		Composite Plu	ig 8D series		
District Strikts. OB S N N Tolerances: Strikts. Strikts. Strikts. NA Strikts. Strikts. Strikts. Strikts. Strikts. NA Strikts. Strints. Strikts. St				-	SCALE		General linear	NPRDS / PROJECT		
CONTACT TYPE : Standard Crimp Contact ORIENTATION : N SHELL SIZE : 23 CONTACT TYPE : SOCKET(500 Matings) PLATING : M = Nickel CONTACT LAYOUT : 23-06					NA					
SHELL SIZE : 23 CONTACT TYPE : SOCKET(500 Matings) SOURIAU it must not be reproduced or communicated without permission PLATING : M = Nickel CONTACT LAYOUT : 23-06 FORMAT SOURIAU DRG N° SHEET						· +	÷			_
PLATING : M = Nickel CONTACT LAYOUT : 23-06 FORMAT SOURIAU DRG N° SHEET					SOURIA	AU WWW.S	OURIAU.COM	it must not be rep	produced or	
	SHELL SIZE : 23		CONTACT TYPE : SOCKE	T(500 Matings)				communicated with	out permission	
A3 8D523M06SN-C 1/2	PLATING : M = Nickel		CONTACT	LAYOUT : 23-06						
				1	A3		8D523M06SN-	C	1/2	

r	т	۵	г	т		0
		Contact Layout				
		06				
4						
		6#8 Concentric Twinax				
		Service M	_			
		23-06				
	Ctc	X Y	-			
	A	0 9.24 8.81 2.87	-			
	C	5.43 -7.49	-			
ω	D	-5.43 -7.49	-			
	E	-8.81 2.87				
	F	0 0				
$ \longrightarrow $						
						SOURIAU shall not be liable for an due to a use of the Products w
						the Specifications issued by either o
						(professional recommenda
						Count
N						FR
						PN: 8D5231
					A 06-10-20	116 First Release
					ISS DATE	Latest modification - by
					Designed By:	Date:
					TITLE	Compo
					SCALE	General linear
						-{
<u>→</u>					NA	
					SOURIA	U WWW.SOURIAU.C
					FORMAT	SOURIAU
					A3	8D523M
L	Н	G	F	E	D	C
			-	_ \	V	

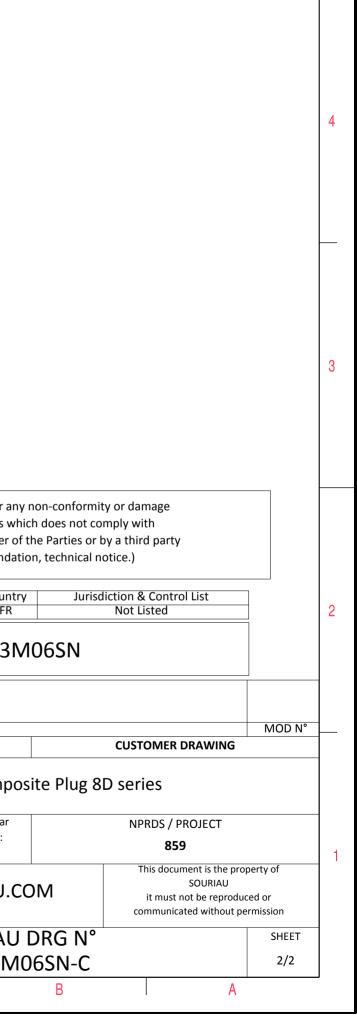

 \triangleright

σ