


σ	1	A					
	I						
				4			
F							
S EXAMPLE	EXAMPLE						
r any non-conformity or damage s which does not comply with							
er of the Partien Idation, techn	es or by a third p ical notice.)	arty					
intry	lurisdiction & Co	ontrollist					
Intry FR	Jurisdiction & Control List Not Listed						
3\$53BB	5						
			MOD N°				
	CUSTON	IER DRAWING					
ess Steel Plug 8D series							
ar	NPRDS / PROJECT						
	This	859 document is the prope	erty of	1			
SOURIAU it must not be reproduced or							
	comm	nunicated without peri	mission				
U DRG			SHEET 1/2				
S53BB-	<u>ر</u>		1/2	J			
В		А					

-	Ŧ	G	г П	m	D	0	
		Contact Layout					
4		$\begin{array}{c} \begin{array}{c} & & & & & & \\ & & & & & & \\ & & & & & $					
	B + 225 (5.72) C + 336 (8.53) D + 450 (11.43) E + 450 (11.43) F + 450 (11.43) G + 336 (8.53) H + 225 (5.72) J - 225 (5.72)	Y-axis (mm) Contact position ID X-axis (mm) Y-axis (mm) +455 (11.56) g -225 (5.72) -260 (6.60) +330 (9.91) f -336 (8.53) -169 (4.95) +325 (8.26) g -336 (8.53) -065 (1.65) +130 (3.30) h -336 (8.53) +065 (1.65) -130 (3.30) m -225 (5.72) +226 (6.60) -325 (8.26) n -112 (2.84) +325 (8.26) -130 (3.30) m -225 (5.72) +280 (6.60) -410 (10.41) p +000 (0.00) +260 (6.60) -410 (10.41) q +112 (2.84) +325 (8.26) -325 (8.26) f +225 (5.72) +130 (3.30)					
ω	M 450 (11.43) N 450 (11.43) P 336 (8.53) R 225 (5.72) S 112 (2.84) T +.000 (0.00) U +.112 (2.84) V +.225 (5.72) Contact Locatic position X-axis	+.000 (0.00) 1 +225 (5.72) 130 (3.30) +.130 (3.30) u +.112 (2.84) 195 (4.95) +.325 (8.26) y +.000 (0.00) 260 (6.60) +.390 (9.91) w 112 (2.84) 195 (4.95) +.455 (11.56) x 225 (5.72) 130 (3.30) +.390 (9.91) y 225 (5.72) +.130 (3.30) +.396 (8.26) z 225 (5.72) +.130 (3.30) +.260 (6.60) AA 112 (2.84) +.195 (4.95) Contacts Contact					
	X +.336 (8.53) Y +.336 (8.53) Z +.336 (8.53) <u>a</u> +.225 (5.72) <u>b</u> +.112 (2.84) <u>c</u> +.000 (0.00) <u>d</u> 112 (2.84) Shell Arrangement Num size no. con	(mm) (mm) (mm) (mm) +.195 (4.95) BB +.000 (0.00) +.130 (3.30) +.055 (1.65) CC +.112 (2.24) +.065 (1.65) 065 (1.65) DD +.112 (2.24) +.065 (1.65) 196 (4.95) EE +.000 (0.00) 130 (3.30) 206 (6.60) FF 112 (2.24) 065 (1.65) 226 (6.60) FF 112 (2.24) 065 (1.65) 320 (9.20) 950 112 (2.24) 005 (1.05) 339 (9.91) HH +.000 (0.00) +.000 (0.00) 325 (8.26)				SOURIAU shall not be liable for due to a use of the Products	
N			<u>-</u>			the Specifications issued by eithe (professional recommen	er o nda
					A 07-10-20 ISS DATE	PN: 8D52	3
					Designed By:	Date: Stainle	
→					NA SOURIAU	Tolerances:	:
					FORMAT A3	SOURIA 8D523	٩U
	Н	G	F	E	D	С	

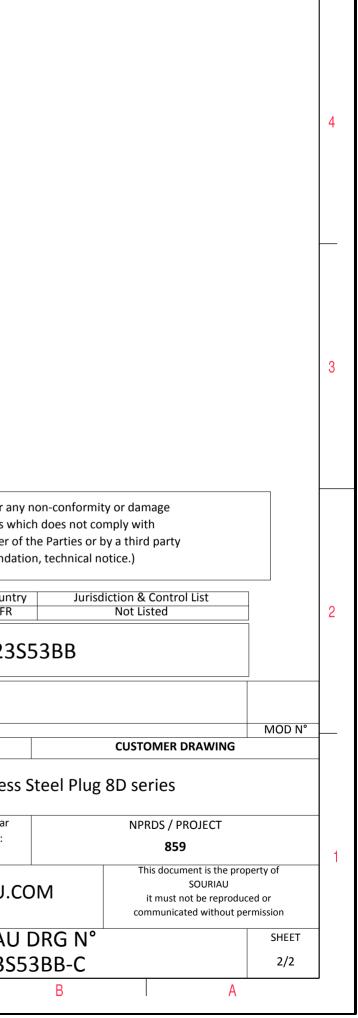

 \triangleright

σ