
	т п		0				
Z'	ØS						
CHARACTERISTICS	Keying Shown as example	noncion	LAYO	UT SHOWN AS EXAMPLE			
-Standard : Based on MIL-DTL-38999 Series III -Shell Material : Composite -Shell Plating : Olive drab Cadmium -Insulator : Thermoplastic -Contacts : Copper Alloy -Seals & Grommet : Silicon Elastomer -Contact Plating : Gold over copper Alloy 0.8μm minimum	mposite ØS 48 Max Z' 31.5 Max SOURIAU s ve drab Cadmium VV THREAD M37x1-6g due to a ermoplastic the Specifica (product) pper Alloy con Elastomer due to a				IAU shall not be liable for any non-conformity or damage e to a use of the Products which does not comply with cifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed		
-Durability: 500 Mating cycles-Delivered with Souriau contacts and Accessories-Temperature Range: -65°C to +175°C-Salt Spray: 2000 hours		A ISS Designed	07-10-2016 First Release DATE Latest modification	N: 8D525J41AE	CUSTOMER DRAWING	MOD N°	
			TITLE	Composite Plug 8			
BASIC SERIES: 8D 5 - 25 J SHELL TYPE : Plug with RFI Shielding	41 A E	SCAL NA		General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the property	y of	
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 25 PLATING : J = Olive drab Cadmium	CONTA	ORIENTATION : E CT TYPE : PIN(500 Matings) CONTACT LAYOUT : 25-41	AT	SOURIAU.COM SOURIAU DRG N° 8D525J41AE-C	SOURIAU it must not be reproduced o communicated without permiss		
H G	F E		C	BD525J4IAE-C	A	_, _	

ſ	т	۵	г	m		0
		Contact Layout 41				
4		22#22D, 3#20 11#16, 2#12 3#8 Triax				
	Ctc X A 0 B 7.09 C 10.77 D 12.94 E 13.27 F 8.17 G 4.67 H 0 J -4.67 K 8.17	25-41 Y Ctc X Y 10.79 Y -5.37 7.92 11.34 Z 3.32 5.72 7.92 a 7.96 -0.42 3.39 b 0 -6.6 -1.62 c -7.96 -0.42 -6.44 d -3.32 5.72 -12.53 e 0 4.48 -13.37 f 3.02 3.07 -12.53 g 5.32 0.005				
ω	K -8.17 L -13.27 M -12.94 N -10.77 P -7.09 R 5.37 S 7.32 T 10.39 U 1.77 V -1.77 W -10.39 X -7.32	-6.44 h 3.7 -2.43 -1.62 i 2.38 -4.74 3.39 j -2.38 -4.74 7.92 k -3.7 -2.43 11.34 m -5.32 0.005 7.92 n -3.02 3.07 3.91 p 0 1.81 0.67 q 2.59 -0.01 -9.66 r 0 -3.53 -9.66 s -2.59 -0.01 0.67 t 0 -0.86 3.91 . -0.53 -0.61				
						SOURIAU shall not be liable for any
						due to a use of the Products wh the Specifications issued by either of (professional recommendati
N						Country FR
					A 07-10-	PN: 8D525J
_					ISS DAT Designed By:	E Latest modification - by Date:
					SCALE	Compo
→					NA	Tolerances:
					SOURI	
					FORMAT A3	SOURIAU 8D525J4
	Н	G	F	E	D	C

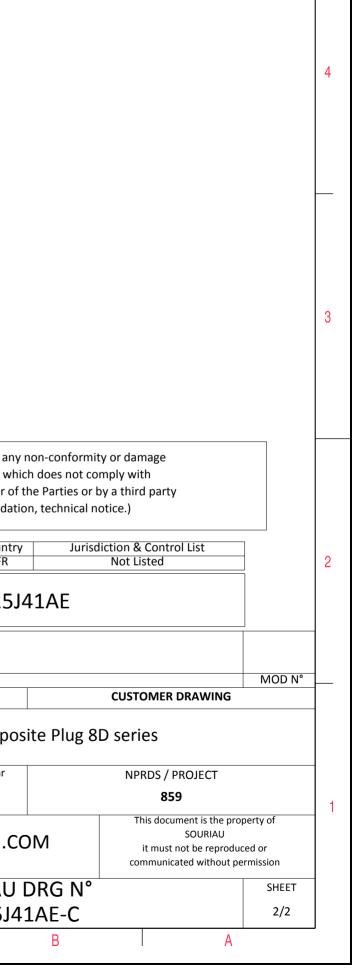

ω