


- Our during in solutioner copper Alling in solutioner copper Alling in solutioner competitioner during in solutioner during in soluting in soluting in solutioner during in solutioner duri	ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב ב	П	т		0	D D		
CHARACTERISTICS         Standard: Based on MIL-DT-38999 Series III         Shell Material       A luminium         Shell Material       Shell Material         Material       Shell Material         Material       Shell Material         Material	B M M M M M M M M M M M M M	S				WWN AS EXAMPLE		
Shell Material       : Aduminium         Shell Material       : B 30 15+0 1/-0.15 R 22:540 x Stell Plating       : B 30 15+0 1/-0.15 R 22:540 x Stell Station the liable for any non-conformity or damage due to a use of the Portlas or by a third party (professional recommendation, technical notice.)         -Seals & Grommet       : Silicon Elastomer         -Contact is       : Copper Alloy 0.8µm minimum         -Durability       : 500 Mating cycles         -Delivered with Souriau contacts and Accessories         -Temperature Range       : -65°C to 1-175°C         -sait Spray       : 500 hours         -Mass       : 39 g ± 10%         Basic SERIES:       80         SHELL TYPE       : Sandard Crimp Contact         SHELL SIZE : 17       If and and Crimp Contact         PLATING       : Z = Black Zinc Nickel			Connector dimension Dim Nominal					
-Delivered with Souriau contacts and Accessories         -Temperature Range : -65°C to +175°C         -Salt Spray : 500 hours         -Mass : 39 g ± 10%         Mass : 39 g ± 10%         BASIC SERIES:       8D 7         SHELL TYPE : Jam nut Receptacle         CONTACT TYPE : Standard Crimp Contact         SHELL SIZE : 17         PLATING : Z = Black Zinc Nickel             CONTACT TYPE : PIN(S00 Matings)             CONTACT TYPE : Standard Crimp Contact             SHELL SIZE : 17             PLATING : Z = Black Zinc Nickel	<ul> <li>-Shell Plating : Black Zinc Nickel</li> <li>-Insulator : Thermoplastic</li> <li>-Contacts : Copper Alloy</li> <li>-Seals &amp; Grommet : Silicon Elastomer</li> <li>-Contact Plating : Gold over copper Alloy 0.8µm minimum</li> </ul>		B         30.15+0.1/-0.15           R         32.5Max           S         41.3±0.4           W         2.2+0.9/-0.1		due to a use of the Pro the Specifications issued by	oducts which does not con y either of the Parties or b mmendation, technical no Country Jurisd	imply with by a third party otice.) liction & Control List	
BASIC SERIES:       8D       7       -       17       Z       06       P       D       D       SCALE       SCALE       NPRDS / PROJECT       859         SHELL TYPE : Jam nut Receptacle       -	-Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C -Salt Spray : 500 hours			ISS DATE	First Release Latest modification - by	D717Z06PD	CUSTOMER DRAWING	MO
CONTACT TYPE : Standard Crimp Contact       ORIENTATION : D       SOURIAU       SOURIAU       SOURIAU       Souriau         SHELL SIZE : 17       CONTACT TYPE : PIN(500 Matings)       CONTACT LAYOUT : 17-06       FORMAT       SOURIAU       Souriau       Souriau         PLATING : Z = Black Zinc Nickel       CONTACT LAYOUT : 17-06       FORMAT       SOURIAU       Souriau       Souriau		06 P D		SCALE -	Gener Toler	al linear ances:	NPRDS / PROJECT <b>859</b>	
A3 8D717706PD-C 1/	SHELL SIZE : 17		CONTACT TYPE : PIN(500 Matings)	FORMAT			SOURIAU it must not be reprodu	ced or

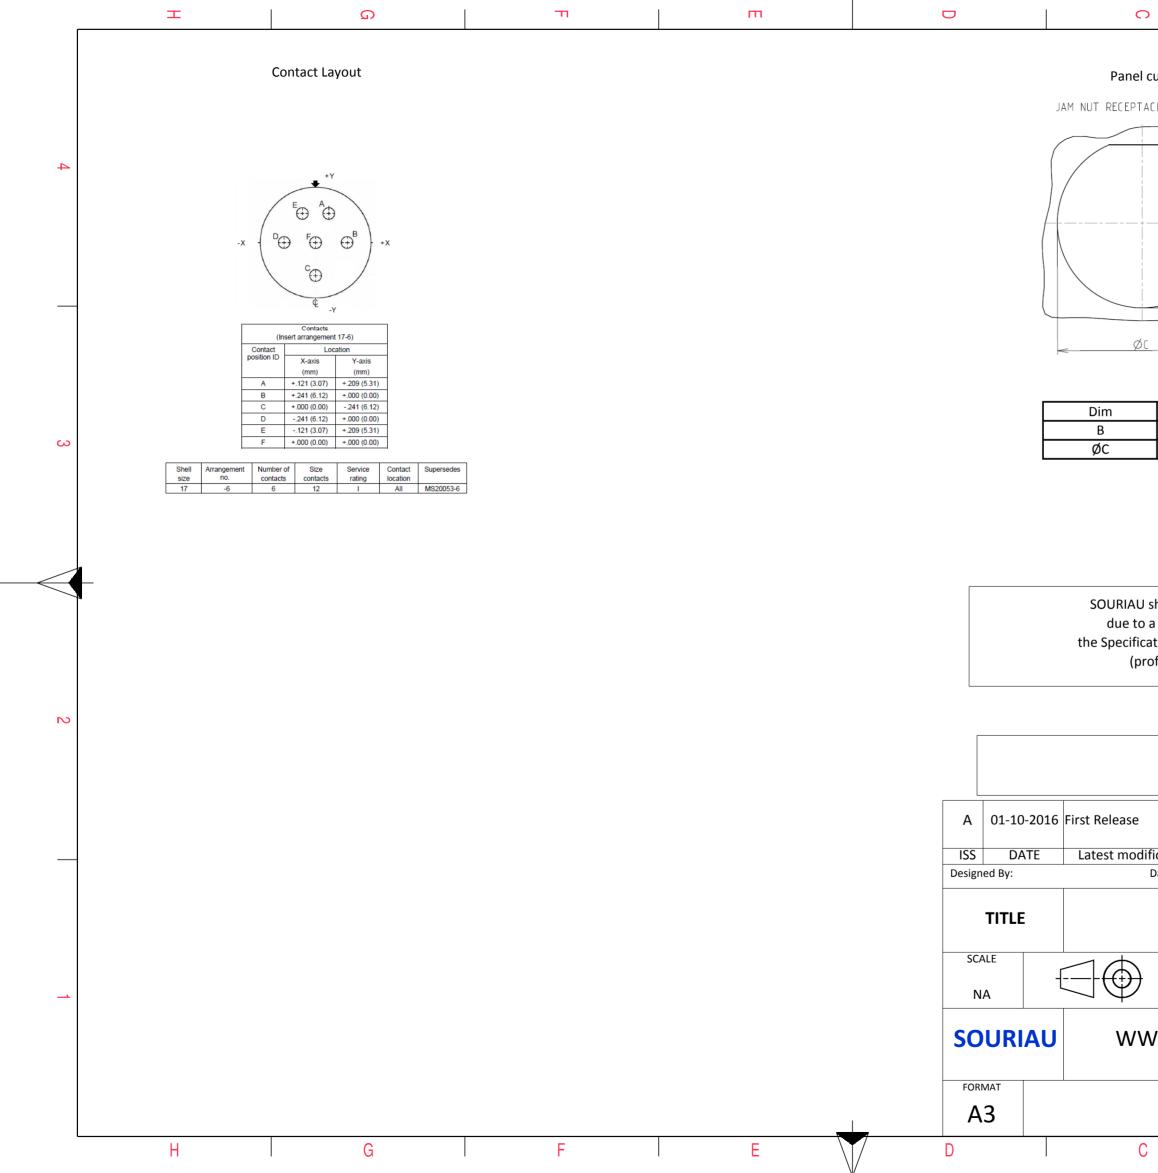

0		σ	₽ >					
l cutou	t							
ACLE (T	YPE 7)							
					4			
Sc								
	>							
	Nessland							
3(	Nominal 0.73+0/-0.25							
32	2.01+0.25/-0				3			
o a use cations	of the Products issued by either	any non-conformit which does not co r of the Parties or t dation, technical n	mply with by a third part	у				
	Сош	ntry Jurisd	iction & Contr	rollist				
	F	-	Not Listed		2			
F	N: 8D71	7Z06PD						
					-			
dificatio Date:	on - by		CUSTOMER	DRAWING	+			
	Aluminiu	um Receptacl	e 8D serie	es				
	General linea	r	NPRDS /	PROJECT	-			
)	Tolerances:		85		4			
WW.SOURIAU.COM       This document is the property of SOURIAU         it must not be reproduced or communicated without permission								
	SOURIA	U DRG N°		SHEET	-			
		ZO6PD-C		2/2				
С		В		Α				