
н G т	m	D	0	د ت	>	
	S		<image/> <section-header></section-header>	MNE		4
Keying Show CHARACTERISTICS -Standard : Based on MIL-DTL-38999 Series III	vn as example Connector dimension Dim Nominal					
 Shell Material : Aluminium Shell Plating : Black Zinc Nickel Insulator : Thermoplastic Contacts : Copper Alloy Seals & Grommet : Silicon Elastomer Contact Plating : Gold over copper Alloy 0.8µm minimum Durability : 500 Mating cycles 	A 49.2±0.3 B 33.32+0.1/-0.15 R 32.5Max S 46±0.4 W 3+0.9/-0.1 VV THREAD M28x1-6g		SOURIAU shall not be liable for any n due to a use of the Products which the Specifications issued by either of th (professional recommendation Country FR	h does not comply with he Parties or by a third party n, technical notice.) Jurisdiction & Control List Not Listed		2
-Delivered with Souriau contacts and Accessories -Temperature Range : -65°C to +175°C -Salt Spray : 500 hours		A 30-09-2016 ISS DATE	PN: 8D719Z3 First Release Latest modification - by	32PN	 MOD N°	_
		Designed By:	Date:	customer drawing Receptacle 8D series		_
BASIC SERIES: 8D 7 - 19 Z 32 P N SHELL TYPE : Jam nut Receptacle	ORIENTATION : N	SCALE NA SOURIAU	General linear Tolerances: ± WWW.SOURIAU.CC	it must not be repre	oduced or	- _ 1
SHELL SIZE : 19 PLATING : Z = Black Zinc Nickel H G F	CONTACT TYPE : PIN(500 Matings) CONTACT LAYOUT : 19-32	FORMAT A3	SOURIAU E 8D719Z32 C		t permission SHEET 1/2	

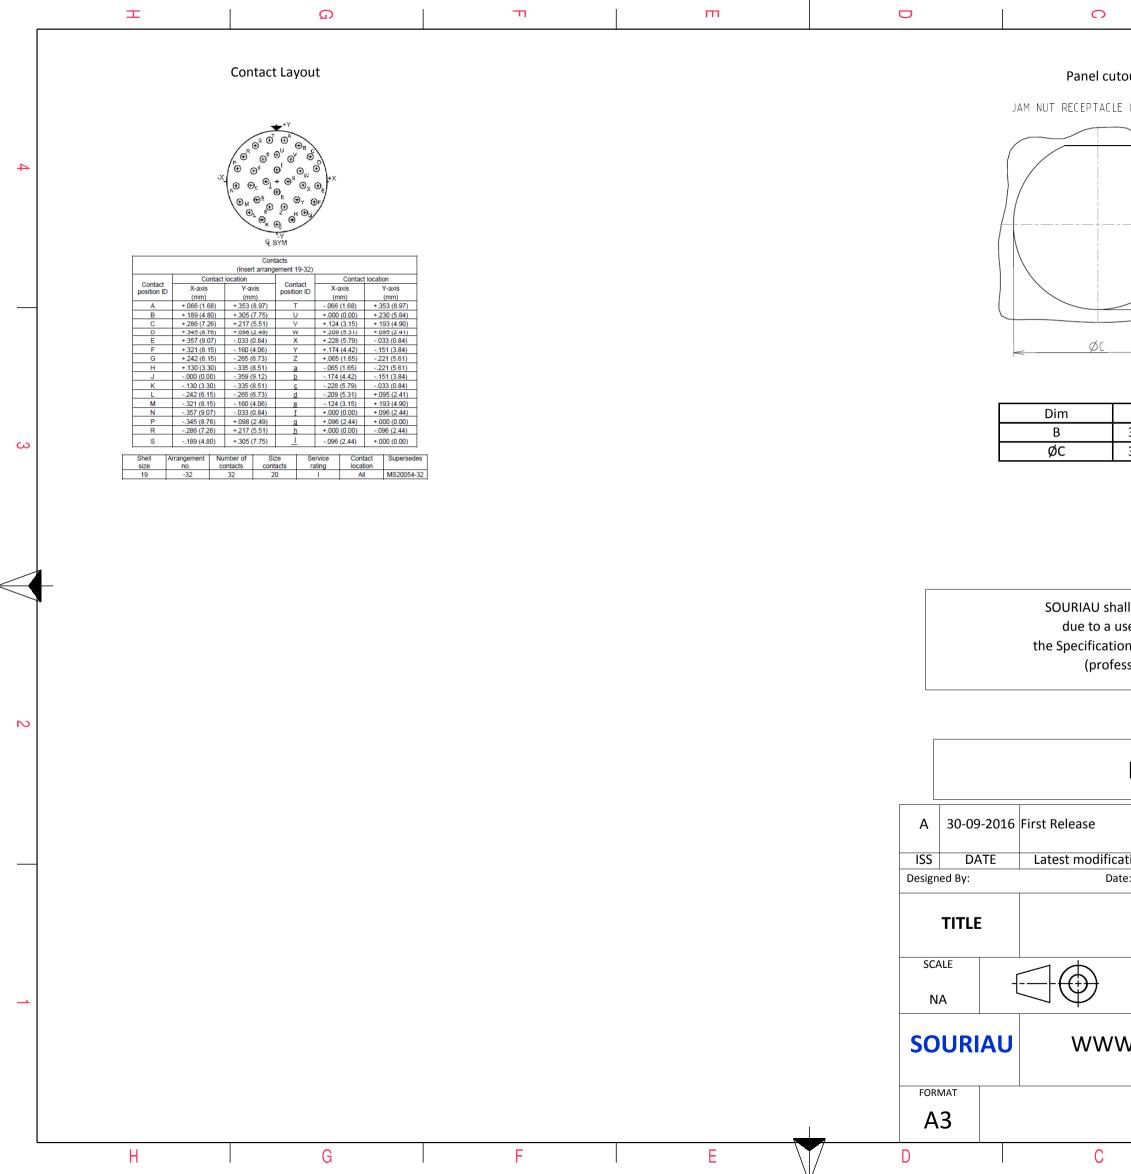

	Φ		A			
tout E (TYPE 7)						
				4		
>						
Nominal 33.91+0/-0.25 35.18+0.25/-0				3		
all not be liable for any non-conformity or damage use of the Products which does not comply with ons issued by either of the Parties or by a third party essional recommendation, technical notice.)						
Cou	· .	diction & Control List Not Listed		2		
PN: 8D71	9Z32PN					
ation - by te:		CUSTOMER DRAWIN		DD N°		
Aluminium Receptacle 8D series						
General linea Tolerances:	r	NPRDS / PROJECT				
±		859		1		
W.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
SOURIA	U DRG N°	1	SH	IEET		
8D719	Z32PN-C			2/2		
	В		А			