
ז ה מ		0	Œ	A		\neg
<complex-block><complex-block></complex-block></complex-block>	ØA	<image/> <image/>	AYOUT SHOWN AS EXAMPLE			4
Keying Shown as example						
CHARACTERISTICS Connector of Co	dimension Nominal 49.2±0.3					
-Shell Plating : Black Zinc Nickel R -Insulator : Thermoplastic S -Contacts : Copper Alloy W	49.2±0.3 33.32+0.1/-0.15 32.5Max 46±0.4 3+0.9/-0.1 M28x1-6g	due to a use the Specification	I not be liable for any non-conformity e of the Products which does not con is issued by either of the Parties or by sional recommendation, technical no	nply with y a third party		
-Seals & Grommet : Silicon Elastomer Contact Plating : Gold over copper Alloy 0.8μm minimum Durability : 500 Mating guales				ction & Control List Not Listed		2
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories			PN: 8D719Z32SA			
-Temperature Range: -65°C to +175°C-Salt Spray: 500 hours	A					
	ISS Desig	S DATE Latest modificat igned By: Date	-	CUSTOMER DRAWING	MOD N°	-
		TITLE	Aluminium Receptacle	e 8D series		
BASIC SERIES: 8D 7 - 19 Z 32 S A → SHELL TYPE : Jam nut Receptacle		NA	General linear Tolerances: ±	NPRDS / PROJECT 859 This document is the propert	ty of	1
CONTACT TYPE : Standard Crimp Contact SHELL SIZE : 19 CONTACT	ORIENTATION : A TYPE : SOCKET(500 Matings)	OURIAU WWW	.SOURIAU.COM	SOURIAU it must not be reproduced communicated without permi	or	
PLATING : Z = Black Zinc Nickel	CONTACT LAYOUT : 19-32	ORMAT A3	SOURIAU DRG N° 8D719Z32SA-C		SHEET 1/2	
H G F I	E D	C	B	A	-, -	

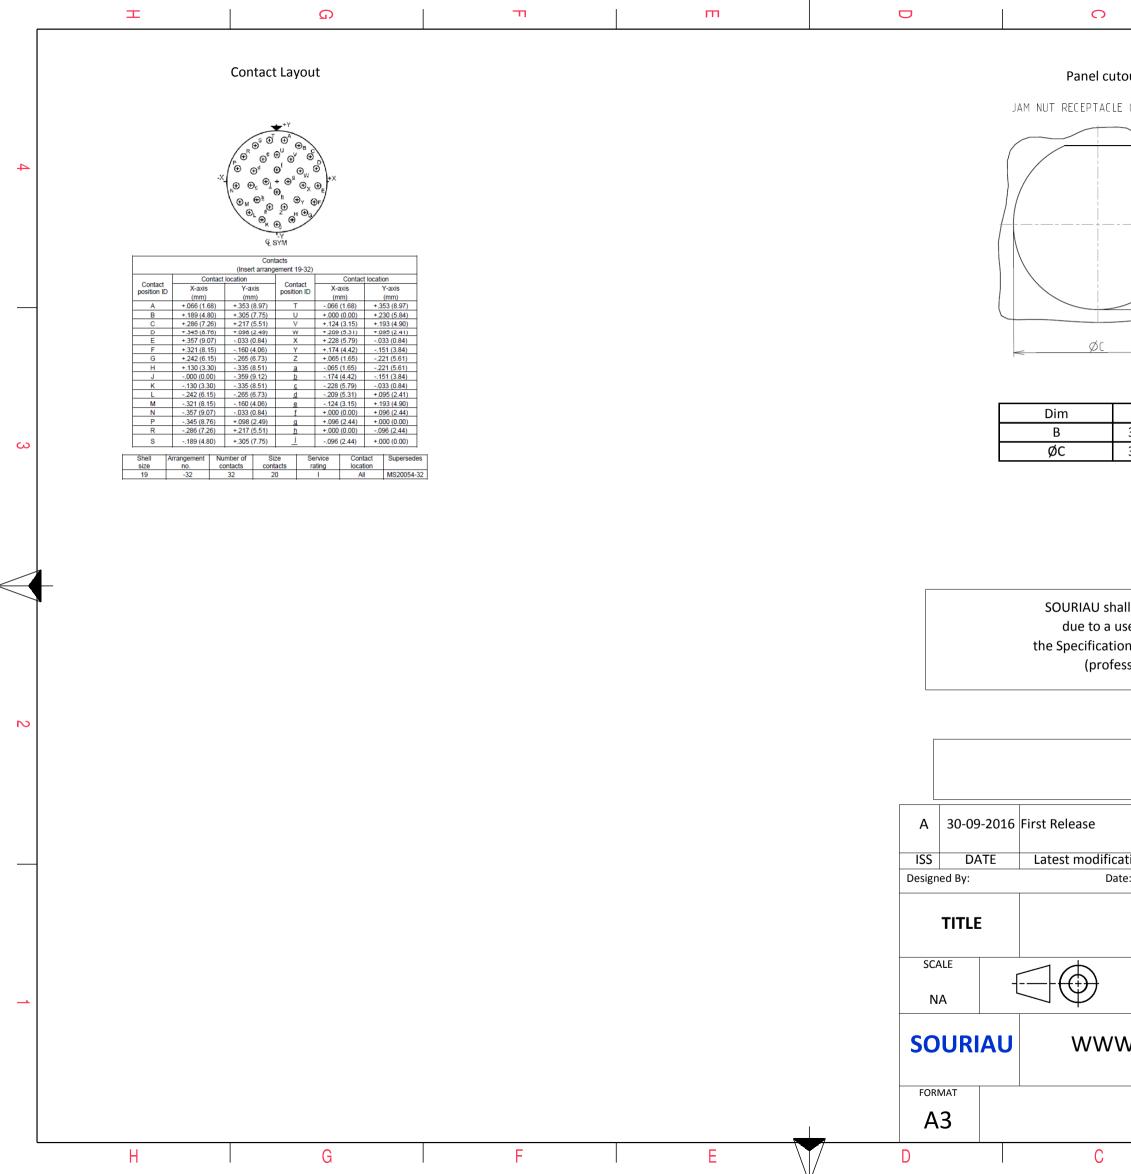

			Ξ		Þ		
	YPE 7)	<u>م</u>					4
	Nominal 3.91+0/-0.29 5.18+0.25/-0						3
use (ons essic	of the Prode issued by e onal recome	ucts which ither of the mendation Country FR	does not co e Parties or l , technical n Jurisd	by a third par	ty		2
atio ite:	n - by Alumi	inium R	eceptac	сиятоме le 8D seri	R DRAWING	MOD N°	
۸/	General Toleran ±	ices:	ΝΛ	8 This doo	⁷ PROJECT 59 cument is the pro SOURIAU		1
v v .	SOUR		RG N°		t not be reprodu icated without pe		
	I		D	I	А		