REV.	DATE	DESCRIPTION	BY	C'K'D'
01	20-11-95	CONVERSION ME10	NIETVELT	
02	30-05-02	BEC 9.3583	LEENAERT	

DIT IS ONZE EIGENDOM EN MAG NOCH NAGEMAAKT, HERDRUKT, OVERGEMAAKT AAN DERDEN, NOCH VOOR FABRIKATIE GEBRUIKT WORDEN, ZONDER ONZE SCHRIFTELIJKE TOELATING. BIJ NIET GEBRUIK IS DE TERUGZENDING VERPLICHT.

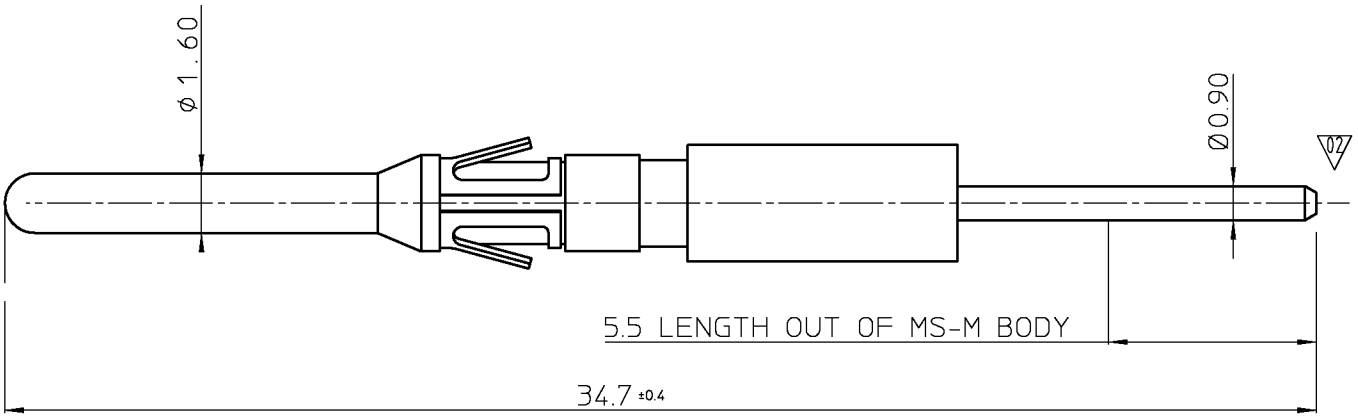

PERFORMANCE CHARACTERISTICS

- CURRENT RATING : 7.5 A MAX.
- CONTACT RESISTANCE : ≤ 3 mΩ
- CONTACT RETENTION IN INSERT : 110 N MIN.

CONTACTS SUITABLE FOR :

- MS-M
- UT-BANTAM
- METALOK BANTAM
- SMS QIKMATE

EXTRACTION TOOL : RX20-25GE1

MATERIAL

- CONTACT BODY :
  MATERIAL : BRASS
  *PLATING : K : 0.4 µ MIN. GOLD ALL-OVER, OVER 2 µ NICKEL MIN. ALL-OVER
  : J : GOLD FLASH ALL-OVER, OVER 2 µ NICKEL MIN. ALL-OVER
  T : 5 µ TIN ALL-OVER, OVER 2 µ NICKEL MIN. ALL-OVER
- RETAINING SPRING :
  MATERIAL : BERYLLIUM COPPER

THIS IS OUR EXCLUSIVE PROPERTY. IT IS NOT TO BE COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY, NOR USED FOR MANUFACTURING WITHOUT OUR WRITTEN CONSENT, AND HAS TO BE RETURNED TO US IN CASE OF NO USAGE

GEN. ST.	01	02	03	04	05	06	07	08	0D	50	60	70	80	90
INT. ST.	10 11	12 13	14 18	20 31	32 33	34 38	39 40	42 43	44 45	46 48	56 70	72 73	75 76	81 82	83 84	88

1DEC ±0,2 1DEC
2DEC ±0,1 2DEC
ANGLES ±1° HOEKEN

WE RESERVE THE RIGHT TO CHANGE DIMENSIONS OR REQUIREMENTS WITHOUT PRIOR NOTICE.

ALL DIMENSIONS IN MM

ALLE AFMETINGEN IN MM

APPR.	DATE	SIGN.
DRAFT	26-12-84	E.CREELLE
CHECKED		
PROD. MGR.	14-01-85	G.D.K.
PR.ENG.MGR.	29-01-85	J.P.L.
PR.MGT.MGR.		

REFERENCES / REFERENTIES

MS HYFEN MALE DIPSOLDER CONTACT .0625

CAT. No. RM20M12E8*

SOURIAU
Connection Technology

SOURIAU
Route Nationale 23
72470 CHAMPAGNE

SCALE

BS,A ,200014,001,02
DRAWING NR. CUSTOMER DRAWING

NOT EXPORT CONTROLLED

BS,A ,200014,001,02

18-Dec-2002 12:28:33