


	Φ	I	A					
		·						
9					4			
∖S EX4	AMPLE				3			
any non-conformity or damage which does not comply with or of the Parties or by a third party adation, technical notice.)								
untry FR	Jurisd	liction & Cont Not Listed	rol List		2			
1Z41BB								
		010200-55		MOD N°				
um	n Receptacle 8D series							
ar		NPRDS / PROJECT 859						
J.CC	.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission							
	DRG N° 1BB-C			SHEET				
.24	B		A	, -	J			

	т	D D	וד	m		0
		Contact Layout				Panel cutout
						JAM NUT RECEPTACLE (TYPE 7)
4	<	31" 23 31" 24 13 HOLES 10 HOLES				
						Max. thickness panel for receptacle:Type 7: 3.2 mm
	Shell Arrangement Numt	Insert arrangement 21-41 Per of Size Service Contact Supersedes	-			Dim Nominal   B 37.08+0/-0.25
ယ	size no. cont 21 -41 4	acts contacts rating location 1 20 I All MS20055-41				ØC 38.35+0.25/-0
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
N						Country FR
						PN: 8D721Z
					A 08-11	-2016 First Release
					ISS DA Designed By:	TE Latest modification - by Date:
					TITLE	Aluminium
_					SCALE	General linear Tolerances:
					SOURI	
					FORMAT	SOURIAU
	Н	G	F	E	A3	8D721Z4
	Н	I G				

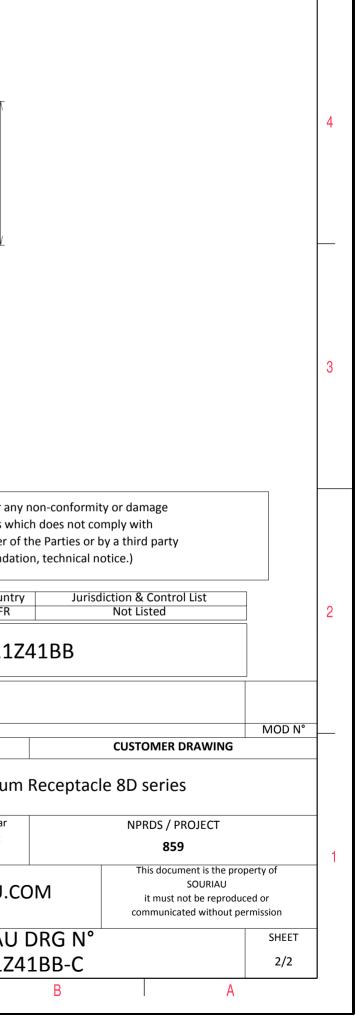

Þ

σ