

Ŧ	G	нт – – – – – – – – – – – – – – – – – – –	m	0



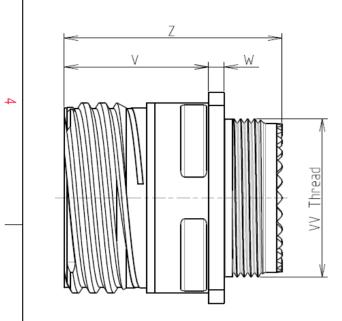

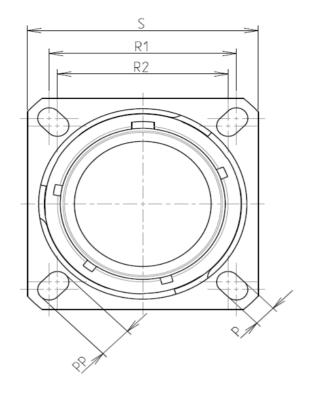

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Mass

BASIC SERIES:

SHELL SIZE : 19

SHELL TYPE : Square Flange Receptacle

PLATING : Z = Black Zinc Nickel

Н

CONTACT TYPE : Standard Crimp Contact

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material		: Aluminium		
	-Shell Plating	: Black Zinc Nickel		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum		
	-Durability	: 500 Mating cycles		
	-Delivered with Souriau	contacts and Accessories		
	-Temperature Range	-65°C to +175°C		
	-Salt Spray	: 500 hours		

: 31.07 g ± 10%

8D 0

G

19

Ζ

11

Ρ

F

Ν


Connector dimension				
Dim	Nominal			
Р	3.25±0.2			
РР	4.93±0.2			
R1	29.36			
R2	26.97			
S	36.5±0.3			
V	20.83+0/-1.25			
W	2.1/2.5			
Z	31.5 Max			
VV THREAD	M28x1-6g			


ORIENTATION : N

CONTACT TYPE : PIN(500 Matings)

Е

CONTACT LAYOUT : 19-11



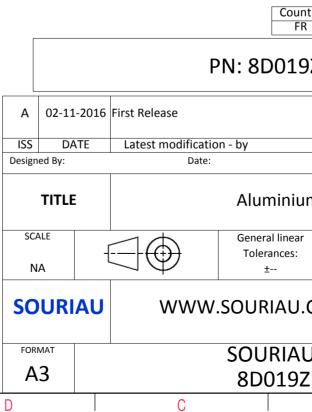

	B						
					4		
7		×					
	- A	1					
					3		
AS EXA	AMPLE						
	non-conformit	ty or damage					
r any non-conformity or damage s which does not comply with							
er of the Parties or by a third party ndation, technical notice.)							
untry							
FR	Not Listed						
9Z11PN							
				-			
	1			MOD N°			
	CUSTOMER DRAWING						
um	m Receptacle 8D series						
ar :			PROJECT				
859 This document is the property of							
J.COM SOURIAU it must not be reproduced or communicated without permission							
	Communicated without permission UDRG N° SHEET						
	1PN-C			1/2			
	В		А		-		

